



Industrie Service

ZERTIFIKAT

Certificate

EG-Baumusterprüfung (Modul B) nach Richtlinie 1999/36/EG und ADR/RID, 6.2.1.4
EC-type-examination (module B) according to Directive 1999/36/EC and ADR/RID, 6.2.1.4

Zertifikat-Nr.: 0036-009-03 **Rev. 3**
Certificate No.:

Gültigkeit / *Validity:* 10 Jahre / 10 Years

Name und Anschrift des Antragstellers: Swagelok Company,
Name and Postal Address of Applicant: 29500 Solon Road, Solon, OH 44139; USA

Hiermit wird bescheinigt, daß das unten genannte EG-Baumuster die Anforderungen der Richtlinie 1999/36/EG erfüllt. / *We herewith certify that the EC type specified below meets the requirements of the Directive 1999/36/EC.*

Prüfbericht Nr.: DS300843-1 Rev.1 des / of TÜV America Inc. Industry
Test Report No.: Service vom/dated May 7th, 2003

Typ, Norm, Zeichnung, Revision, Datum Flaschen nach / *Cylinders according* **EN 1964-3**
Type, Standard, Drawing, Revision, Date "TPED-CY-5-Approval" Rev. B, 3/8/2006
 (Anlage / *enclosure*)

Fertigungsstätte / Manufacturing Plant Swagelok Company, Swagelok Atlantik
 26651 Curtis Wright Parkway
 Willoughby Hills, OH 44092, USA

(Ort, Datum)
 (Location, Date)

München, 2006-11-30



TÜV SÜD Industrie Service GmbH
TÜV-CERT-Zertifizierungsstelle
für Druckgeräte

Klaus J. Meier
 Benannte Stelle, Kennnummer 0036
 Notified Body, identification number 0036

TÜV SÜD Industrie Service GmbH
 Dampf- und Drucktechnik
 Westendstraße 199
 D-80686 München

Tel.: +49 (0) 89 / 5791-1891
 Fax: +49 (0) 89 / 5791-1810
 www.tuev-sued.de


Mitglied der
 CONFÉDÉRATION EUROPÉEN




D'ORGANISMES DE CONTROLE

REVISIONS	
REV.	DCN
A	03-2533
B	

DWG. NO. TPED-CY-5-APPROVAL

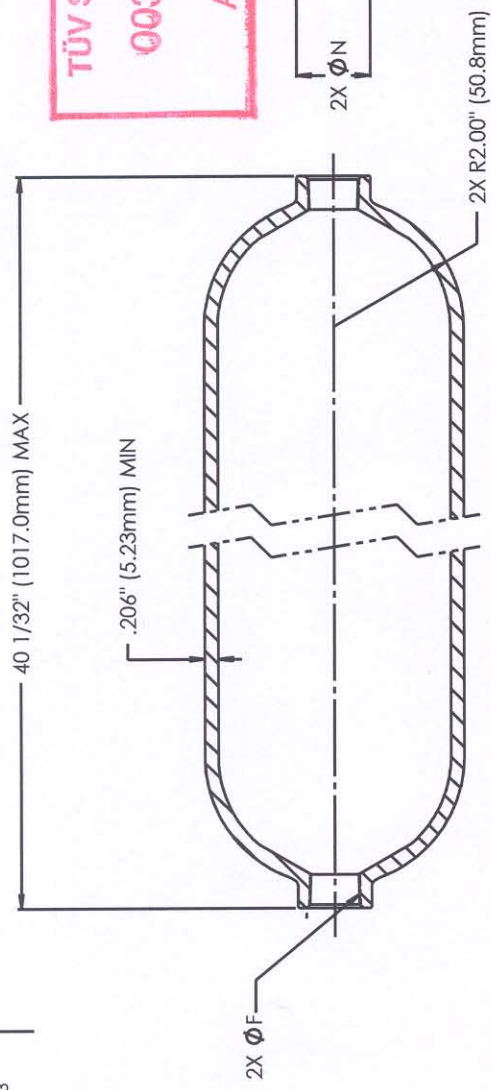

TÜV SÜD Industrie Service GmbH
0036 - 0 0 9 - 0 3 Rev. 3
Anlage 1/1 zum Zertifikat

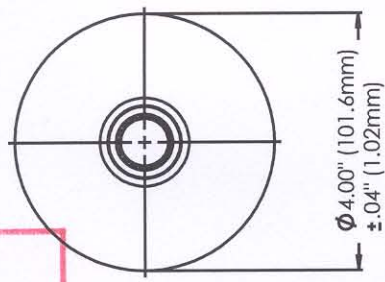

SECTION A-A

- NOTES:
1. CYLINDER FORMED FROM SEAMLESS TUBE
 2. CYLINDER SHOULDER AND NECK THICKNESS SHALL BE EQUAL TO OR GREATER THAN THE MINIMUM SIDEWALL THICKNESS.

Guaranteed Minimum Tensile Strength (N/mm ²)	483	Guaranteed Minimum Yield Strength (N/mm ²)	200	Impact Strength @ -50° C (J/cm ²)	60	Test Pressure (bar)	150
	Minimum Elongation		40%				

Part Number	Fitting Designator	Fitting Specification	Nominal Size	Major Thread Diameter, (F) in (mm)	Neck Diameter, (N) in (mm)
F4	ASME B1.20.1	1/4 NPT	RC 1/4	.540 (13.72)	.80 (20.3)
F6	ASME B1.20.1	3/8 NPT	RC 3/8	.675 (17.14)	.88 (22.4)
F8	ASME B1.20.1	1/2 NPT	RC 1/2	.840 (21.34)	1.14 (29.0)
F12	ASME B1.20.1	3/4 NPT	RC 3/4	1.050 (26.67)	1.38 (35.1)
F4RT	ISO 7 / 1	ISO 7 / 1	RC 1/4	.540 (13.72)	.80 (20.3)
F6RT	ISO 7 / 1	ISO 7 / 1	RC 3/8	.675 (17.14)	.88 (22.4)
F8RT	ISO 7 / 1	ISO 7 / 1	RC 1/2	.840 (21.34)	1.14 (29.0)
F12RT	ISO 7 / 1	ISO 7 / 1	RC 3/4	1.050 (26.67)	1.38 (35.1)
MS6	SAE J1926-1	3/8	3/8	.563 (14.30)	.88 (22.4)
MS8	SAE J1926-1	1/2	1/2	.750 (19.05)	1.14 (29.0)
AND6	MS 33649	3/8	3/8	.563 (14.30)	.88 (22.4)
AND8	MS 33649	1/2	1/2	.750 (19.05)	1.14 (29.0)

THIS PRINT IS THE EXCLUSIVE PROPERTY OF SWAGELOK COMPANY. IT MUST BE RETURNED ON REQUEST ALONG WITH ANY DOCUMENTS CONTAINING INFORMATION OBTAINED FROM THIS PRINT. NEITHER THIS PRINT NOR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, DISCLOSED TO OTHERS OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF SWAGELOK COMPANY. SUBJECT TO PATENTS AND/OR PENDING APPLICATIONS AND MAY NOT BE MANUFACTURED WITHOUT PERMISSION FROM SWAGELOK COMPANY.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS & .XX # 691 ANGLES # 1 DEGREE INTERPRET DIM. AND TOL. PER ASME Y14.5M-1994

TITLE SAMPLE CYLINDER
MATERIAL 304L (B)

DRAWN BY JMH
CHECK/APPR BY JMK
DATE 4/23/2003
DATE 3/8/2006

SHEET 1 of 1
SCALE 1:2
REV. B
DWG. NO. TPED-CY-5-APPROVAL

